

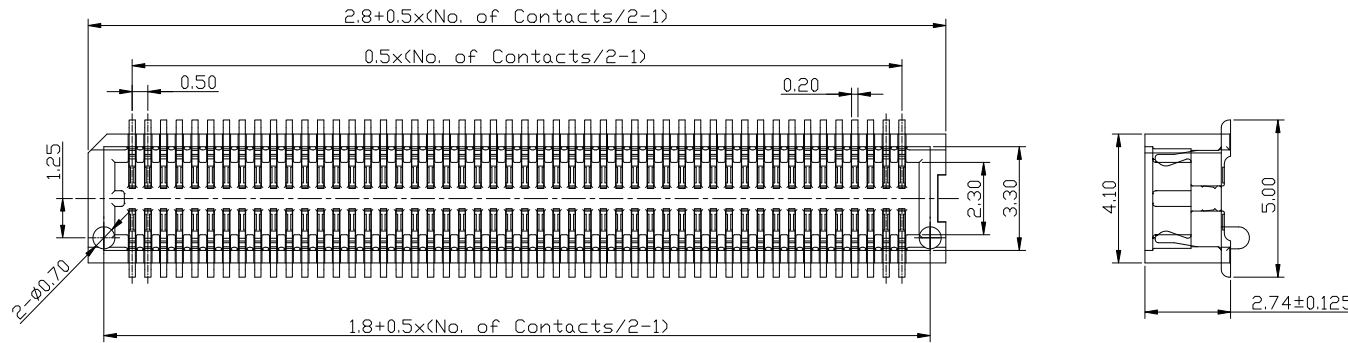


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Sun	11/9/2015

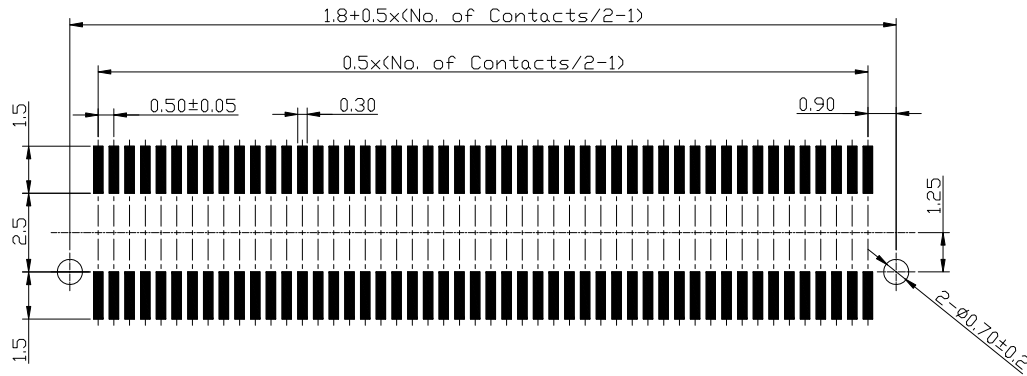

- NOTES
- 1.RATING: 0.5A AC/DC
 - 2.VOLATAGE: 50V AC/DC
 - 3.CONTACT RESISTANCE: 40 MILIOHMS MAX
 - 4.INSULATION RESISTANCE: 100 MOHM MIN.(100V DC)
 - 5.WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE

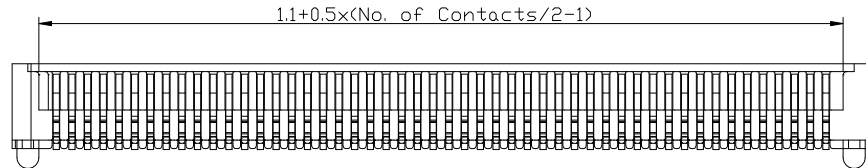

PCB Layout For Surface Mounting

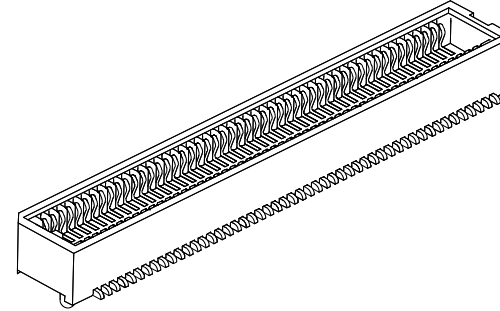

PART NUMBER:
110-10003-XX

No. of contacts
20: 100PIN
100: 100PIN

GENERAL TOLERANCE .X±0.38 .XX±0.25 .XXX±0.15	ANGLE TOLERANCE X°± 5.0° .X°± 3.0° .XX°± 2.0° .XXX°± 1.0°	DRAWN Sun 11/9/15'	DATE	
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED River 11/9/15'	DATE	PART NUMBER 110-10003-XX
SHEET 1 OF 2				DRAWING NO. 110-10003
				SIZE A4 REV. A

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
2	TERMINAL	SEE PART NUMBER	BRASS,PLATING GOLD 1~3u"MINI PLATING OVER 50u" NICKEL MINI UNDERPLATING OVERALL	
1	HOUSING	1	PA9T+45%GF,COLOR BLACK	UL94-V0