



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	AXL	3/28/2016

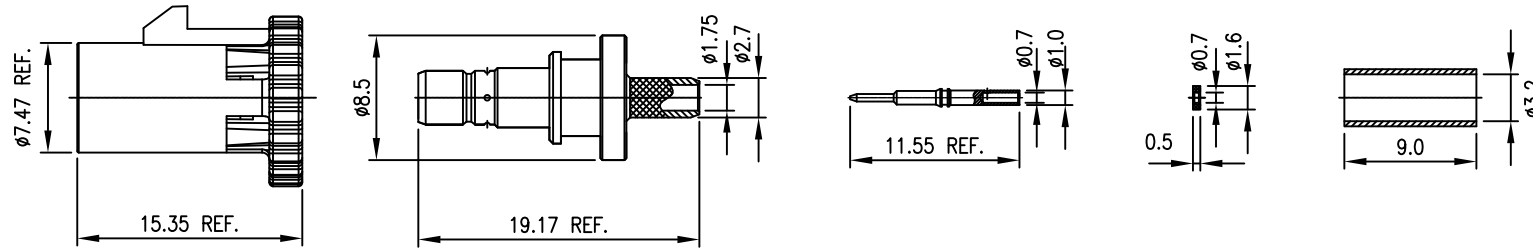

NOTES:

1. IMPEDANCE: 50 ohm.
2. VOLTAGE RATING: 500 V.
3. FREQUENCY RANGE: DC-4.0 GHz.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 V.
5. CONTACT RESISTANCE: CENTER CONTACT: 20m ohms.
OUTER CONTACT: 10m ohms.
6. INSULATION RESISTANCE: 1000M ohms min.
7. VSWR: 1.3 MAX.
8. RoHS COMPLIANT.
9. FOR RG-316 CABLE.

ORDER INFORMATION

P/N	KEY CODE	COLOR
192-10003-01	C	SIGNAL BLUE
192-10003-02	D	BORDEAUX VIOLET
192-10003-03	E	LEAF GREEN
192-10003-04	F	BROWN
192-10003-05	G	BLUE GREY
192-10003-06	H	HEATHER VIOLET
192-10003-07	I	BEIGE
192-10003-08	K	CURRY YELLOW
192-10003-09	A	DEEP BLACK
192-10003-10	B	SIGNAL WHITE

ITEM	NAME	Q'TY	DESCRIPTION	FINISHED
5	SHELL	1	PA46	
4	FERRULE	1	PER ASTM B75, UNS C11000 OR C12200	NICKEL 100u" OVER COPPER
3	INSULATOR	1	TEFLON MIL-P-19468	
2	CONTACT PIN	1	BERYLLIUM COPPER C17300	GOLD 15u" OVER COPPER
1	BODY	1	BERYLLIUM COPPER C17300	NICKEL 100u" OVER COPPER

GENERAL TOLERANCE X ± .X ± 0.30 .XX ± 0.20 .XXX ±	ANGLE TOLERANCE X° ± .X° ± .XX° ± .XXX° ±	DRAWN AXL	DATE 3/28/16'	 GENESIS TECHNOLOGY, INC. TITLE: FAKRA CABLE RECEPTACLE
MATERIAL SEE BOM		CHECKED	DATE	
FINISH SEE NOTES		APPROVED		DRAWING NO. 192-10003
SCALE N/A		UNIT mm		SIZE AA
SHEET 1 OF 1		REV. A		