

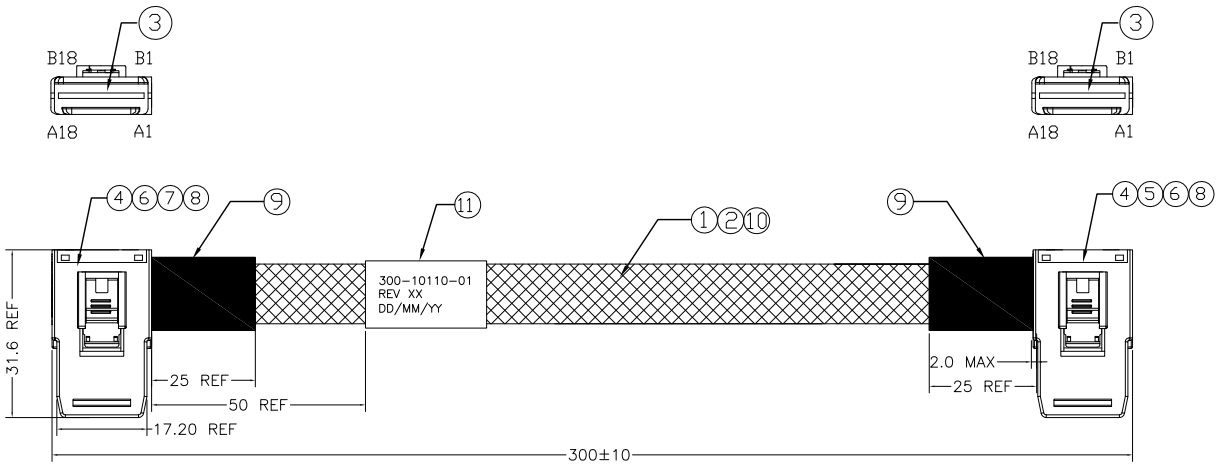


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	HSIO	7/21/2016



LABEL INFORMATION



WIRING TABLE

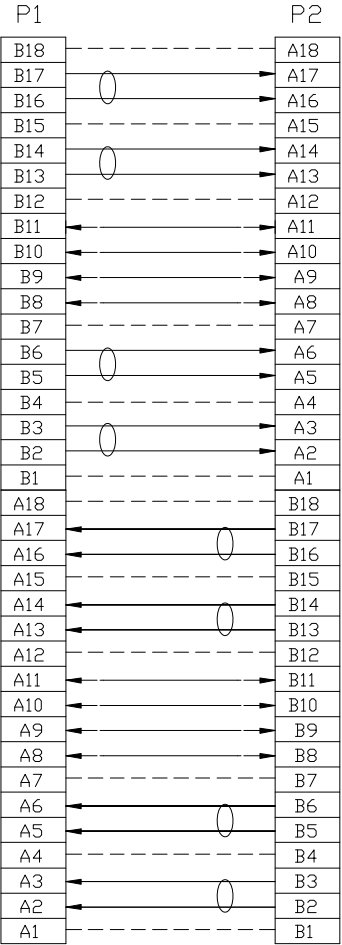


NOTES:

- TEST:
 - 100% TEST OPEN, SHORT, MISWIRE;
 - INSULATION IMPEDANCE: 10M Ohm/Min/300VDC
 - CONDUCTOR RESISTANCE: 3.0 Ohm/Max.
 - HI POT TEST: 300V AV/10ms.
- THE PRODUCT CONFORMS TO THE MECHANICAL DIMENSION AND ELECTRICAL PERFORMANCE REQUIREMENTS: SFF 8086 AND SFF 8087
- THE CABEL MEETS SAS 2.1 SPECIFICATIONS.

MATERIAL:

- HOUSING: PBT, BLK
- PCB: FR-4 15u"
- CABLE:
 - CONDUCTOR: TINNED COPPER
 - INSULATION: HDPE
- LATCH: S301
- RIVET: S304

12	DUST-PROOF FOR SFF-8087, HDPE	P-MSIPE-0006	2
11	ID LABEL, 60*25MM	10081646-002	1
10	PLASTIC BRAID SLEEVE, Ø8.0, PET, BLACK	O-NB-S-0004	A/R
9	ACETATE TAPE, 25mm, BLACK	O-AT-S-0004	A/R
8	LATCH FOR SFF-8087, SUS 301	OTEZ025A/SS=P	2
7	PLASTIC SHELL FOR SFF8087 RIGHT EXIT, PBT, BLK	P-MSIPB-0003	1
6	INNER MOLDING FOR SFF8087 RIGHT/LEFT EXIT, BLK	P-MSIPE-0007	2
5	PLASTIC SHELL FOR SFF8087 LEFT EXIT, PBT, BLK	P-MSIPB-0002	1
4	METAL CLIP FOR SFF8087 RIGHT/LEFT EXIT, S301	M-MSISLOT-04	2
3	PCB FOR SFF8087 RIGHT EXIT, FR-4, AU15u	P-MSI3015-02	2
2	FLAT CABLE 30AWG, GRAY, 4P	CAB-FLA-Y-4P-30PC-02	A/R
1	SAS CABLE, 30AWG, DERAN FOIL COLOR SILVER	CAB-MSI-D-30MN	A/R
S/N	DESCRIPTION	ITEM NO.	QTY.

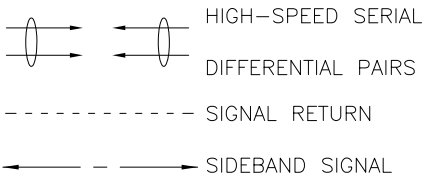

GENERAL TOLERANCE X.± 0.50 .X± 0.20 .XX± 0.10 .XXX± 0.05	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN HSIO	DATE 2016.07.21	
MATL SEE BOM	FINISH SEE NOTES	CHECKED	DATE	
SCALE N/A	UNIT mm	APPROVED	DATE	PART NUMBER. 300-10110-01
SHEET 1 OF 1				DRAWING NO. 300-10110
				SIZE A4
				REV. X1