

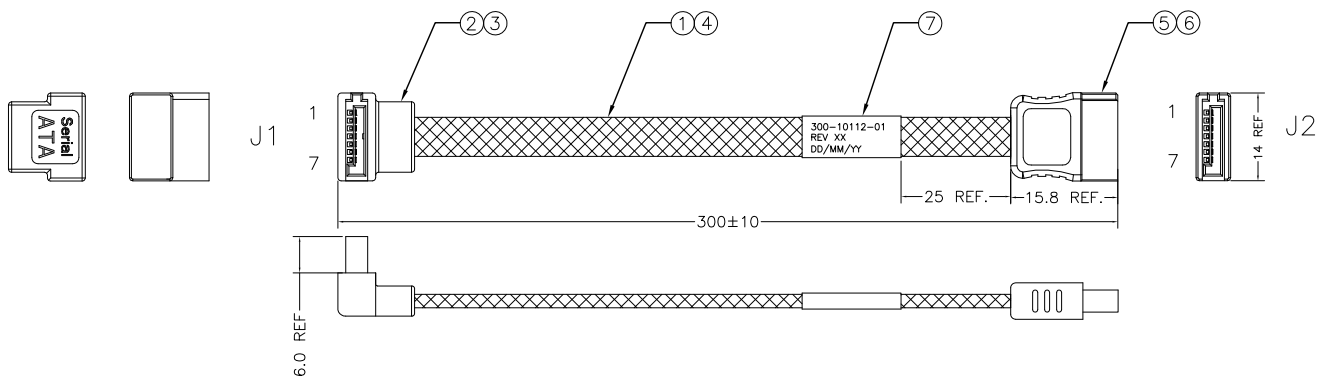


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		INITIAL	HSIO	7/21/2016

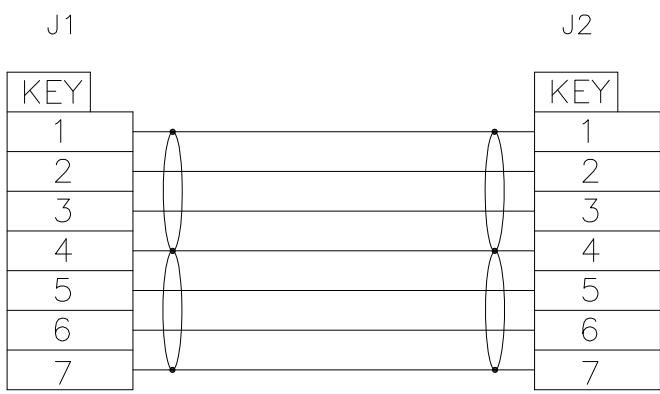

WIRING TABLE

LABEL INFORMATION



- TEST CONDITIONS:
100% TEST FOR ALL CABLE ASSEMBLIES
1. OPEN & SHORT WITH MISS WIRING TEST
 2. CONDUCTIVE RESISTANCE: 1Ω MAX.
 3. HI-POT TEST: 300VDC 5MΩ MIN.

P/N	DESCRIPTION	ITEM NO.	Q.T.Y
7	LABEL, 30*40MM, WRAPPING AROUND	L-01-C-0001	1
6	OVER MOLDING FOR SATA 7P 180°, 45P PVC, BLACK	P-SATPV-0002	1
5	SATA 7P CONN, SOLDER TYPE, G/F	PBQ-023BB-A1-1	1
4	PLASTIC BRAID, W=4.0MM, Ø4.0, PET, 48*1*0.20*4.0. BLACK	O-NB-S-0006	A/R
3	OVER MOLDING FOR SATA 7P 90°, 45P PVC, BLACK	P-SATPV-0003	1
2	SATA 7P 90° CONN G/F, SOLDER TYPE, W/O PIN HOLE	PBQ-043BB-A1-0	1
1	SAS CABLE, 30AWG, DERAN FOIL COLOR SILVER	CAB-MSI-D-30MN	A/R

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	
X.± 0.50	X°±	HSIO	2016.07.21	
.X± 0.20	.X°±	CHECKED	DATE	TITLE. SATA R/A TO SATA STR WITH LOOSE PAIR
.XX± 0.10	.XX°±	APPROVED	DATE	PART NUMBER. 300-10112-01
.XXX± 0.05	.XXX°±			DRAWING NO. 300-10112
MATL SEE BOM				SIZE A4
FINISH SEE NOTES				REV. X1
SCALE N/A	UNIT mm			
SHEET 1 OF 1				