

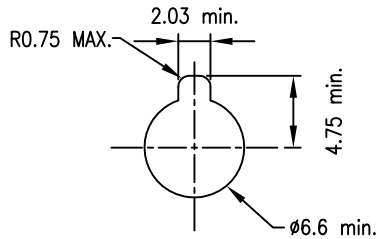


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	AXL	3/30/2016

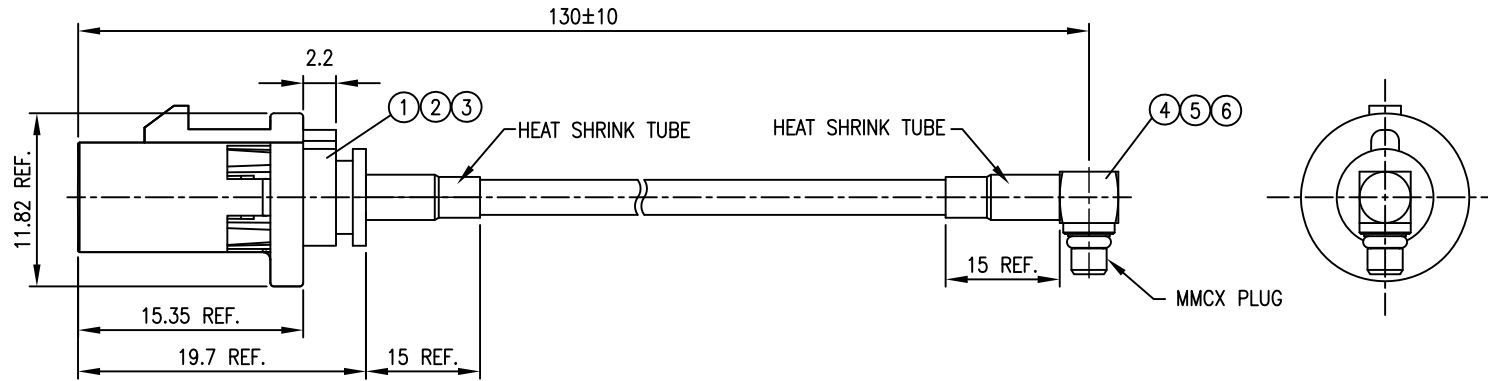

RECOMMENDED MOUNTING HOLE

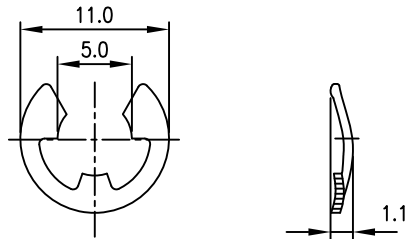

C-RING THICKNESS: 0.6mm
(PACKAGED IN PE BAG SEPARATED)

- NOTES:
1. IMPEDANCE: 50 ohm.
 2. VOLTAGE RATING: 500 V.
 3. FREQUENCY RANGE: DC-3.0 Ghz.
 4. DIELECTRIC WITHSTANDING VOLTAGE: 800 V.
 5. INSULATION RESISTANCE: 1000M ohms min.
 6. INSERTION LOSS: 0.6 dB MAX.
 7. VSWR: 1.6 MAX.
 8. RoHS COMPLIANT.
 9. RG-316/U BROWN CABLE.
 10. CRIMPED FERRULE HEX. CRIMP SIZE 3.3mm.

6	INSULATOR	1	TEFLON MIL-P-19468	
5	CONTACT PIN	1	BRASS	GOLD OVER NICKEL OVER COPPER
4	MMCX BODY	1	BRASS	GOLD OVER NICKEL OVER COPPER
3	INSULATOR	1	TEFLON MIL-P-19468	
2	CONTACT PIN	1	BERYLLIUM COPPER C17300	GOLD 15u" OVER COPPER
1	FAKRA BODY	1	BERYLLIUM COPPER C17300	NICKEL 100u" OVER COPPER
ITEM	NAME	Q'TY	DESCRIPTION	FINISHED

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE	
X± .X±0.30 .XX±0.20 .XXX±	X'± .X'± .XX'± .XXX'±	AXL	3/30/16'	
MATL	SEE BOM	CHECKED	DATE	TITLE. FAKRA TO MMCX CABLE ASSEMBLY
FINISH	SEE NOTES	APPROVED	DATE	PART NUMBER. 300-10117-01
SCALE N/A	UNIT mm			DRAWING NO. 300-10117
SHEET 1 OF 1				SIZE A4 REV. A