


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	Jesse	04/06/12'
X2		Modify to single connector	Jesse	04/10/12'



- Note:
- Technology Parameter
    - Voltage Rating: 60VAC (R.M.S)
    - Frequency Range: 0~6G Hz
    - Nominal Characteristic Impedance: 50 ohms
    - Operating Temperature Range: -40°C~+85°C
    - Operating Humidity: 95%R.H.MAX
  - Electric Performance
    - Insulation Resistance: 500M ohms
    - Contact Resistance
      - Inner Contact: 25 mohms Max.
      - Outer Contact: 15 mohms Max.
    - Withstand Voltage: 200V AC 1 Min
    - VSWR\*: <=1.4@ 0~6.0GHz
  - Mechanism Performance
    - Durability: 30 Cycles
  - All the material followed the RoHS standard.

PRELIMINARY  
NOT RELEASED

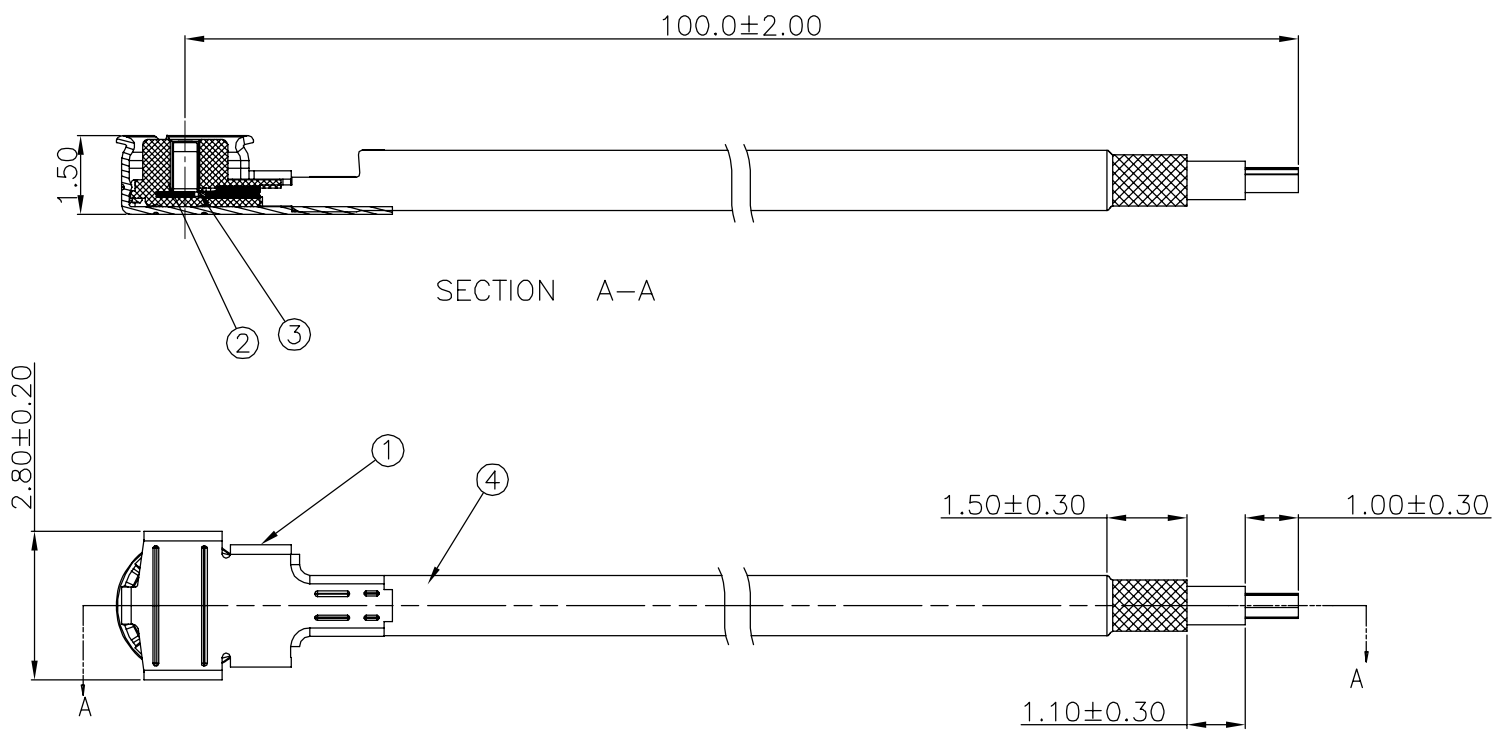

GENERAL TOLERANCE XX. ± 1.0 X. ± 0.50 .X ± 0.38 .XX ± 0.25	ANGLE TOLERANCE X° ± 3° .X° ± 2° .XX° ± 1° .XXX° ±	DRAWN Jesse	DATE 04/10/12'	TITLE. COAXIAL CABLE ASS'Y
MATL SEE BOM	CHECKED	DATE	PART NUMBER. GT17-200157	
FINISH SEE BOM	APPROVED	DATE	DRAWING NO. GT17-200157	SIZE A4
SCALE N/A	UNIT mm			REV. X2
SHEET 1 OF 1				

ITEM	NAME	Q'TY	DESCRIPTION	MATERIAL	NOTE
4	CABLE	1		Copper Alloy	Tin Plating, OD=Ø1.13, Color=Black
3	CONTACT	1		Copper Alloy	Au Plating Over Ni
2	HOUSING	1		Hi Temp. Plastic	Color=Black, UL94V-0
1	SHELL	1		Copper Alloy	Au Plating Over Ni