



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	AXL	05/09/06
B		Update drawings	Bolin	10/25/13
C		Change Label	Bolin	04/22/14

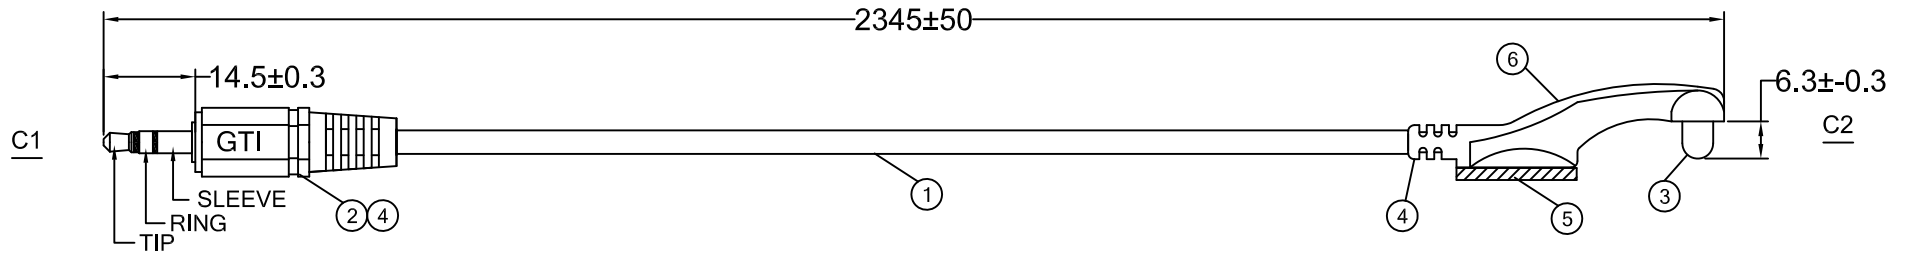

- Notes:
1. CABLE: [24AWG(19/0.127)X2C+DW(7/0.163)+AL/MY]TIN
INSULATION: SR-PVC, OD=Ø1.1±0.005, COLOR: RED, WHITE
JACKET: PVC, OD=Ø3.5±0.2mm, COLOR: BLACK.
UL2835, VW-1, 60°C, 30V.
 2. 100% TEST, OPEN, SHORT AND MISWIRE.
 3. CONDUCTOR RESISTANCE: 1Ω Max;
 4. INSULATION RESISTANCE: 5MΩ Min ;
 5. VOLTAGE/CURRENT RATING: 5V / 0.5A.
 6. RoHS 6/6 Compliant.

WIRE LIST

C1	COLOR	C2
TIP	RED	ANODE
RING	WHITE	CATHODE
SLEEVE	D.W.	/



9	LABEL	1pcs	PVC+PAPER,	
8	PE BAG	1pcs	0.05*180*280mm, CLEAR.	
7	USERS MANUAL	1set		
6	ABS HSG	1set		
5	VELCRO LOOP & HOOK	1pcs	VELCRO LOOP, OD=19mm	
4	PVC	15g	60°C 60P PVC COLOR: BLACK.	
3	IR LED	1pcs	940nm, IR333C-A	
2	PLUG	1pcs	SINGLE Ø2.5mm PLUG, NICKEL PLATED.	
1	CABLE		UL2835 24awg*2C+DW+AL/MY, OD=3.5mm, BLACK.	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

GENERAL TOLERANCE	ANGLE TOLERANCE	DRAWN	DATE
X.±	X°±		
.X±0.40	.X°±	DESIGN	DATE
.XX±0.30	.XX°±		
.XXX±0.20	.XXX°±	CHECKED	DATE
MATL	SEE BOM	APPROVED	DATE
FINISH	SEE NOTES		
SCALE	N/A		
UNIT	mm		
SHEET	1 OF 2		

PRELIMINARY
NOT RELEASED




TITLE:
IR BLASTER CABLE ASSY


PART NUMBER:
SC-10327

DRAWING NO.
SC-10327



SIZE A4
REV. C



LABEL

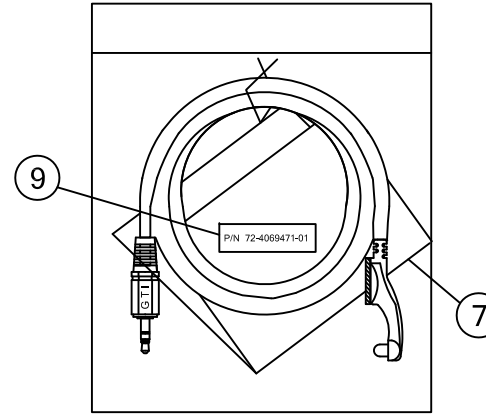

PACKING

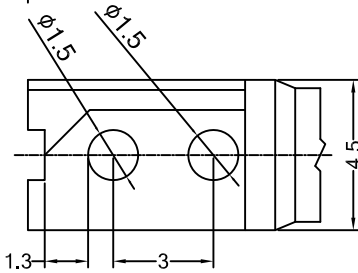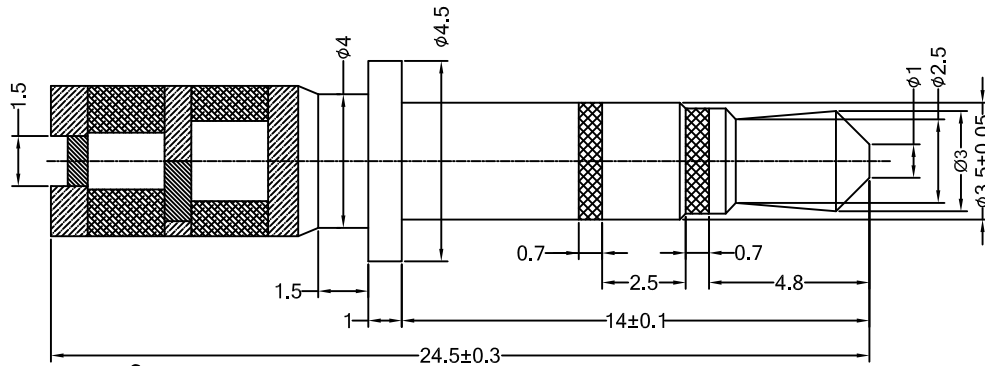

NOTES:

1. INSULATION MATERIAL:P.P. COLOR:BLACK.
2. CONNECTOR MATERIAL:BRASS,NICKEL PLATED 50u".
3. RoHS 6/6 COMPLIANT.
4. MFG PART NUMBER: DCJW-1101-QKB3P91.
5. DIELECTRIC STRENGTH: 250 VAC.
6. INSULATION RESISTANCE: 100 M ohms min.

GENERAL TOLERANCE X.± .X±0.40 .XX±0.30 .XXX±0.20	ANGLE TOLERANCE X°± .X°± .XX°± .XXX°±	DRAWN	DATE	
MATERIAL SEE BOM		DESIGN	DATE	
FINISH SEE NOTES		CHECKED	DATE	PART NUMBER SC-10327
SCALE N/A	UNIT mm	APPROVED	DATE	DRAWING NO. SC-10327
SHEET 2 OF 2				SIZE A4 REV. C